



1764-

THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Juan Antonio Barrio)
Calle, et al.)
Serial No.: 09/974,635)
Filed: October 9, 2001) Our Ref: B-4330 619132-0
For: "COMPOSITIONS FOR CABLES)
FILLING") Date: January 10, 2002

CLAIM TO PRIORITY UNDER 35 U.S.C. 119

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

[X] Applicant hereby makes a right of priority claim under 35
U.S.C. 119 for the benefit of the filing date(s) of the
following corresponding foreign application(s):

<u>COUNTRY</u>	<u>FILING DATE</u>	<u>SERIAL NUMBER</u>
EP	10 October 2000	00500210.0

[] A certified copy of each of the above-noted patent
applications was filed with the Parent Application
No. _____.

[X] To support applicant's claim, a certified copy of the above-
identified foreign patent application is enclosed herewith.

[] The priority document will be forwarded to the Patent Office
when required or prior to issuance.

I hereby certify that this correspondence
is being deposited with the United States
Postal Service with sufficient postage as
first class mail in an envelope addressed
to the "Commissioner of Patents and
Trademarks, Washington, D.C. 20231",
on January 16, 2002 by Cheryl Liang.

C80


Respectfully submitted,

Ross A. Schmitt

Ross A. Schmitt
Attorney for Applicant
Reg. No. 42,529

LADAS & PARRY
5670 Wilshire Boulevard
Suite 2100
Los Angeles, CA 90036
Telephone: (323) 934-2300
Telefax: (323) 934-0202

RECEIVED
JAN 31 2002
TC 1700

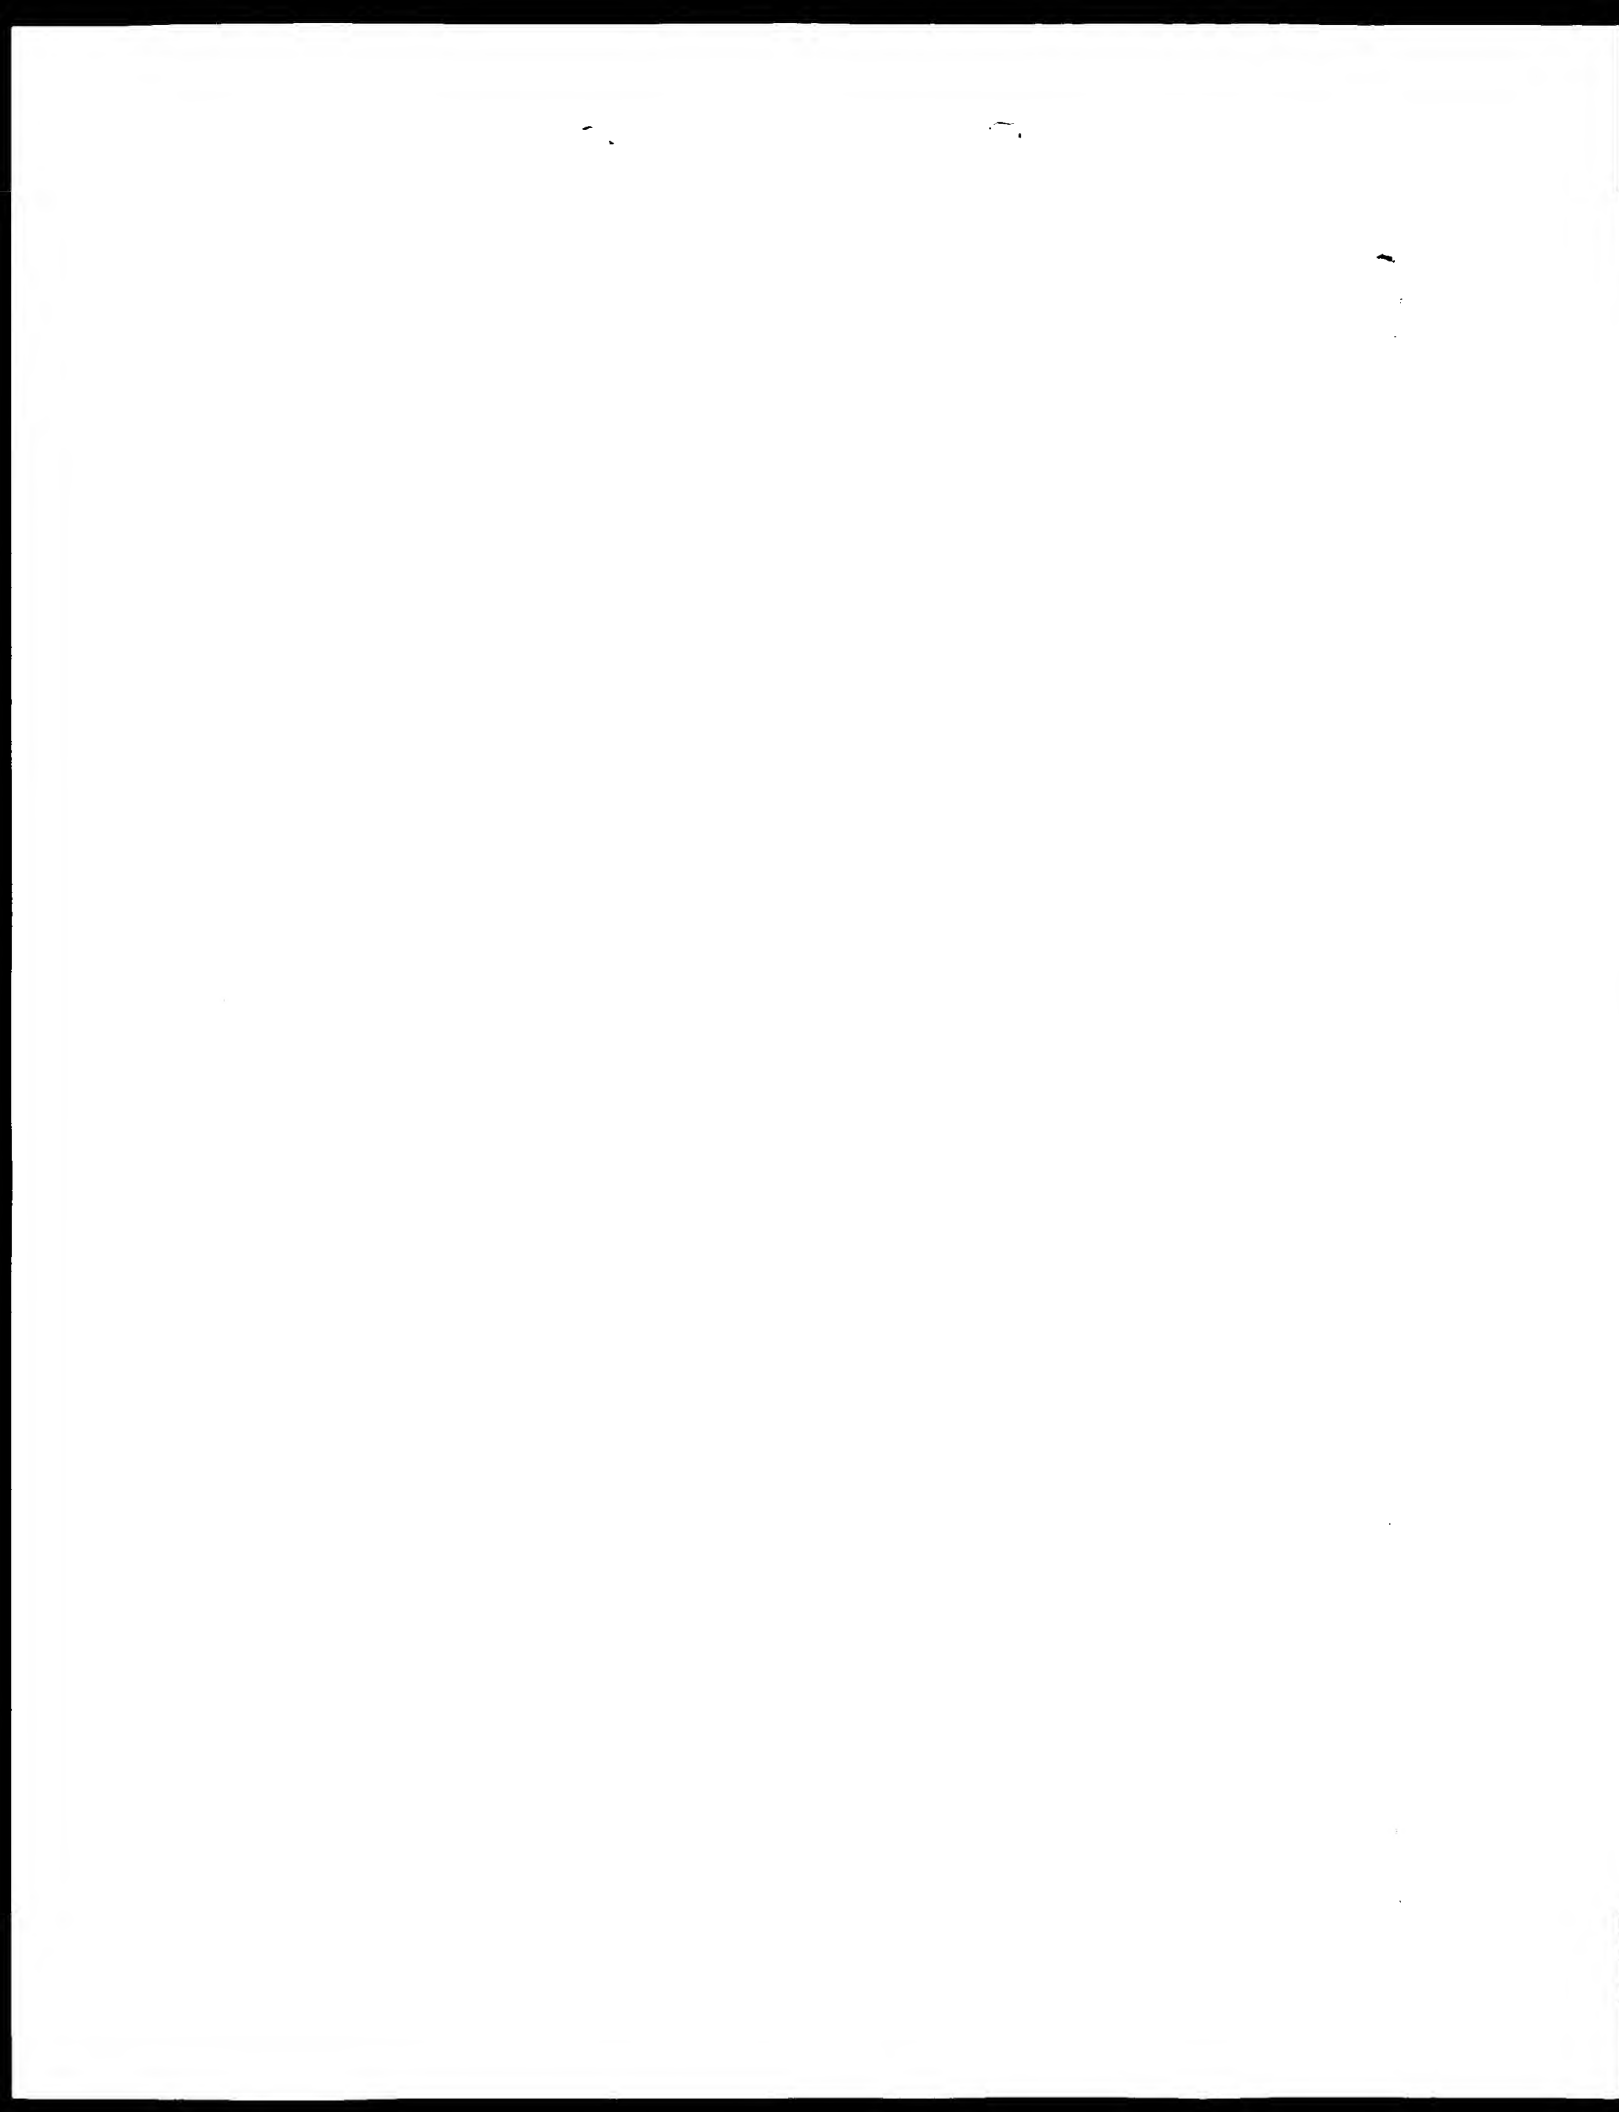




Europäisches
Patentamt

European
Patent Office

Office européen
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00500210.0

RECEIVED
JAN 31 2002
TC 1700


Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 22/10/01
LA HAYE, LE

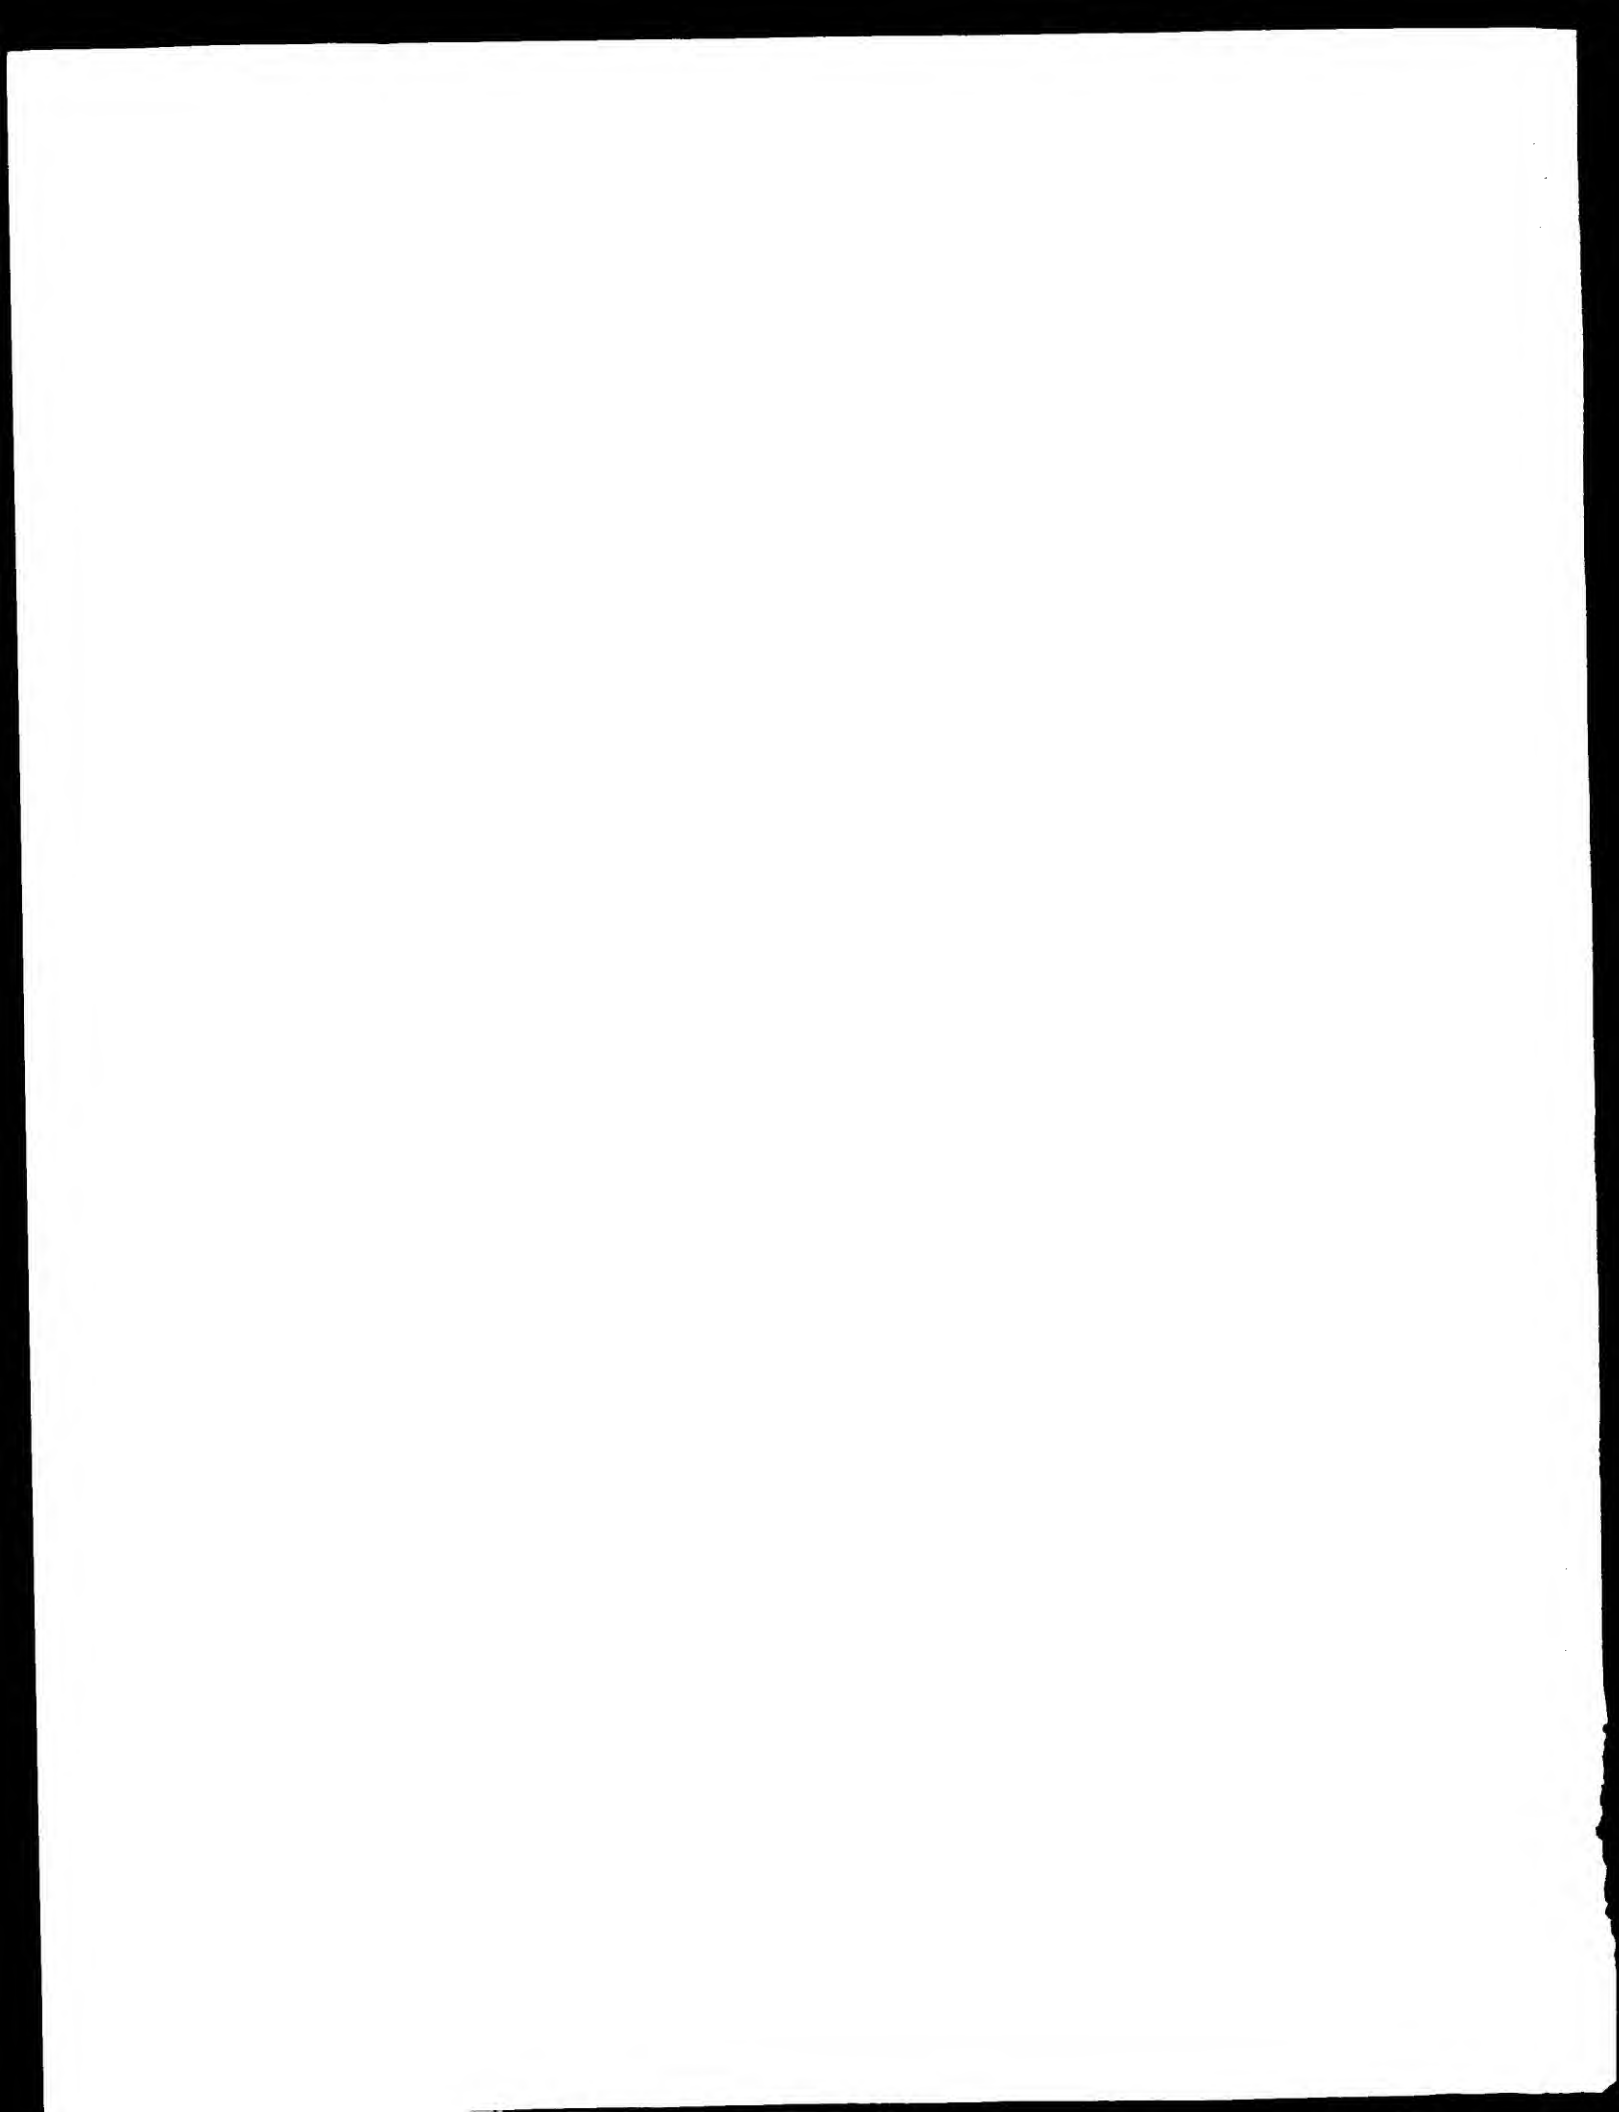



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.: 00500210.0
Demande n°:

Anmeldetag:
Date of filing: 10/10/00
Date de dépôt:

Anmelder:
Applicant(s)
Demandeur(s)
Dynasol Elastomeros, S.A.
28046 Madrid
SPAIN

Bezeichnung der Erfindung
Title of the invention:
Titre de l'invention
Composition for cables filling

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)


Staat:
State:
Pays:
Tag
Date
Date

Aktenzeichen
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
H01B3/44, H01B3/22

Am Anmeldetag benannte Vertragsstaaten
Contracting states designated at date of filing AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt

Bemerkungen
Remarks
Remarques

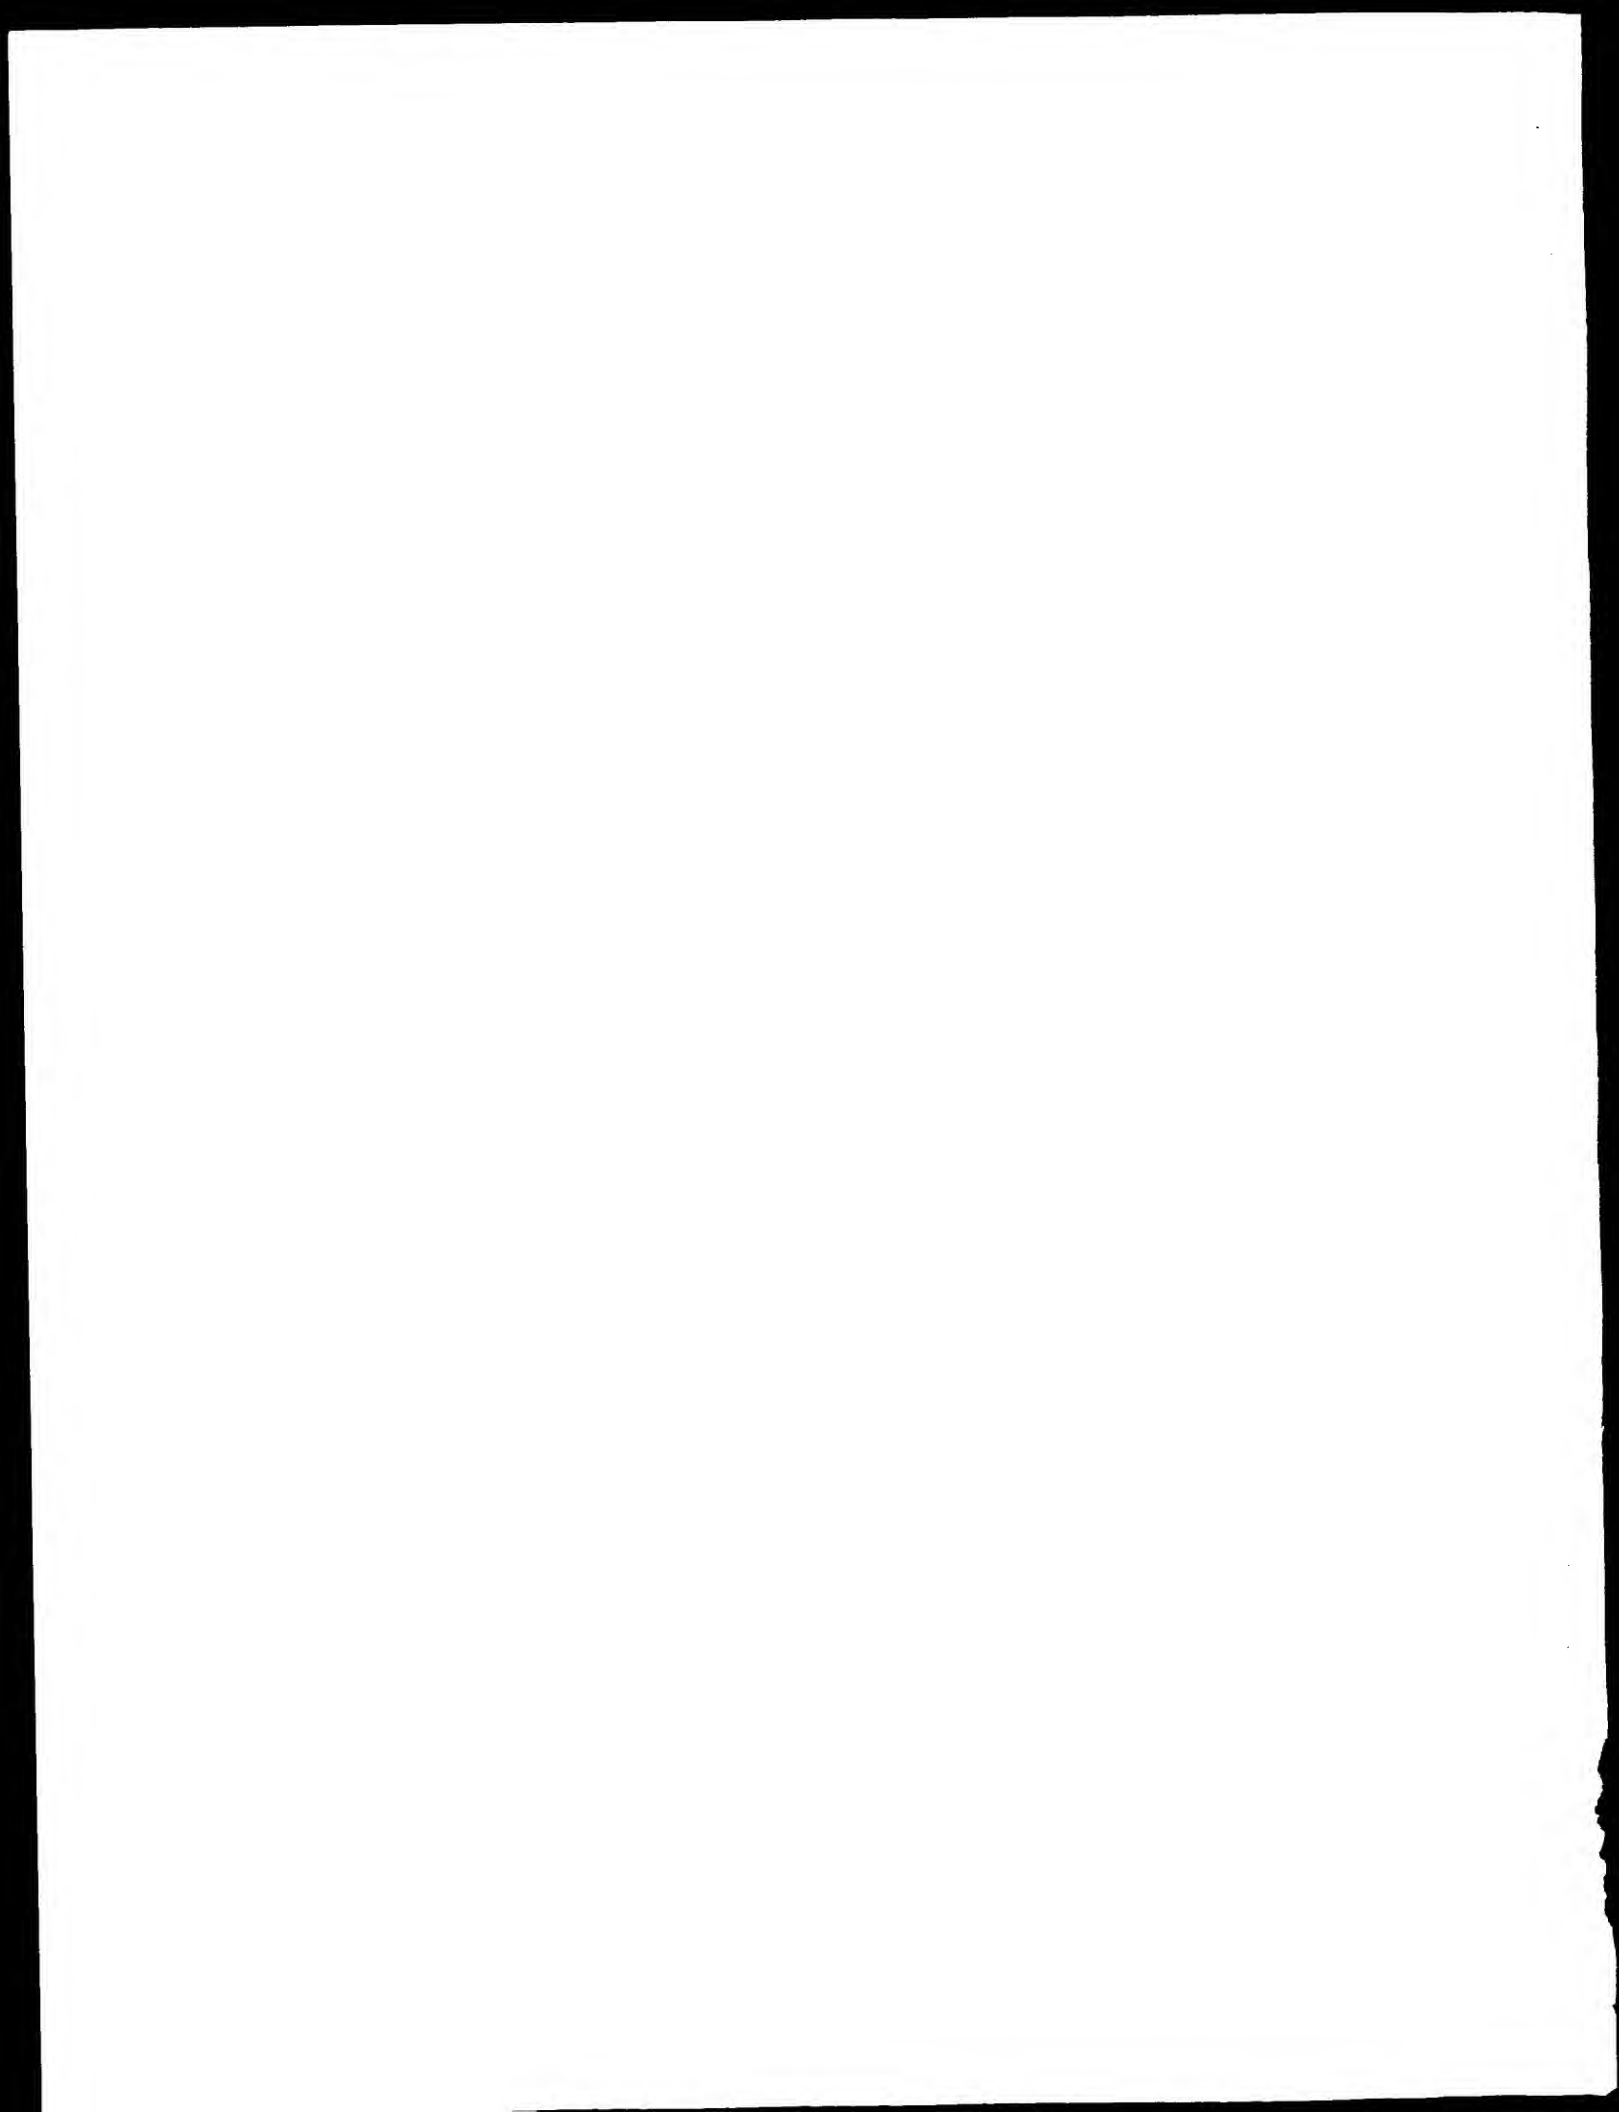

COMPOSITIONS FOR CABLES FILLINGSUMMARY OF THE INVENTION

The present invention relates to the formulation of
5 compositions for cables filling used in telecommunication,
more specifically it relates to the use in these
compositions of a hydrogenated radial styrene-butadiene
block copolymer.

10 STATE OF THE ART

The use of synthetic rubbers in the formulation of
waterproof compounds used in communication cables filling
is known, the aim of these synthetic rubbers is to act as
gelling agents, effective in the formation of a crystalline
15 structure stable during long storage periods and in
different temperature conditions.

On the other hand, the cables filling compositions of
the prior art formulated with synthetic rubber show an
excellent behavior as an anti-humidity barrier, avoiding
20 the penetration of contaminators and protecting the cable
from the breaking due to mechanical efforts during its
handling. Due to their suitable viscosity, they can be
injected at low temperature, filling the interstices of the
cable and giving to the final product characteristics
25 suitable as a support of the wires.

Examples of this type of formulations can be found in
different patents: EP 0749128, US 5358664, US 4810395, US
5348669, EP 0236918 and WO 97/04465.

The formulation of these compositions is realized by
30 using mainly refined mineral basis or synthetic basis with
the addition of synthetic rubbers (usually hydrogenated),
and optionally polyethylene waxes and anti-oxidant
additives.

However, these formulations show the problem that they
35 are very sensitive to the variations of the waxes used in

2

the formulation. Especially the Drip-Test value, that calculates the gel stability in time and at different temperatures. So, for compositions with the same proportions of synthetic rubber, a change in crystallinity
5 in the polyethylene wax can seriously affect the stability of these compounds.

As a consequence, there is the need of a composition for cables filling that shows improved stability over the compositions of the prior art.

10 It has been surprisingly found that the use of a radial hydrogenated styrene-butadiene block copolymer in the formulation of cables filling compounds not only improves the Drip-Test values, but also substantially improves the stability of the compositions.

15

SUMMARY OF THE INVENTION

The invention concerns compositions for cables filling wherein a hydrogenated styrene-butadiene block copolymer with radial structure is used as a gelling agent. This
20 polymer is obtained through styrene and butadiene sequential polymerization and subsequent reaction with a coupling agent preferably of type $Cl_{4-n}MR_n$, wherein $M = Sn$ or Si , and hydrogenation of the resulting polymer.

25 DETAILED DESCRIPTION OF THE INVENTION

The object of the present invention is the provision of compositions for cables filling that show an improved stability.

The composition for cables filling of the present
30 invention is characterized by the use of a hydrogenated styrene-butadiene block copolymer with a radial structure (radial SEBS), obtained through coupling.

The composition comprises: from 70 to 90% of a mineral or synthetic oil, from 0 to 12% of a polyethylene wax, 2 to
35 15% of radial SEBS synthetic rubber.

The radial copolymer can be synthesized through known methods, for example by anionic polymerization catalyzed by butyllithium. In this case, a polymer is prepared by sequential polymerization of a vinyl aromatic monomer (e.g. styrene) and a conjugated diene monomer (e.g. butadiene). A lithium atom ends the chain of the polymer. In this way it is possible to go on polymerizing or reacting with other compounds as in the case of a coupling agent. The coupling agents for polymer chains are known in the art, as for CO_2 , dihaloalcanes, divinylbenzene, carbonates, chlorides, etc. The use of agents, whose functionality is higher than two, allows the formation of radial polymers. The preferred coupling agents of the invention are of type $\text{Cl}_{4-n}\text{MR}_n$, wherein $\text{M} = \text{Sn}$ or Si , R is an alkyl or aryl group and n is an integer from 0 to 2, and the most preferred are those having a theoretic functionality equal to four and more concretely Cl_4Si or Cl_4Sn .

The structure of the butadiene block has preferably a vinyl content sufficient so that, when hydrogenating the polymer, this continues to be soluble in the reaction medium and the resulting polymer maintains its elastomeric properties. More specifically the vinyl content is preferably higher than 25% more preferably higher than 30% and most preferably between 35 and 45% based on the polybutadiene fraction. A known method to achieve these percentages of vinyl addition is the use of polymerization polar modifiers known in the art, such as quaternary amines, ethers, etc...

The styrene content in the copolymer is preferably between 20 and 40%, more preferably between 25 and 35% of styrene.

The coupling percentage of the styrene butadiene chains is not a critical parameter, it should however be sufficient to give the properties of a radial polymer. Preferably more than 80% of the chains and more preferably

more than 90% of the chains are coupled.

The polymer final molecular weight is such that the resulting composition viscosity is as low as possible in order to be easily injectable. For this reason the molecular weight of the polymer of the invention is preferably between 30,000 and 110,000 and more preferably between 60,000 and 90,000. A too low molecular weight would not give the desired properties without adding a higher quantity of polymer, thus increasing the cost of the formulation, while a too high molecular weight would lead to viscous formulations that are difficult to be injected at room temperature and would require a higher amount of energy.

The polymers hydrogenation can be done through the methods known in the art, more preferably by a homogeneous hydrogenation process, under moderate pressure and temperature conditions, that avoids breaking of the coupled polymer chains. More preferably a metallocene catalyst is used that does not require the step of separation of the catalyst from the polymer. The most preferred hydrogenation processes used in the present invention are those described in EP 0601953 and EP 0885905, though they do not limit the present invention.

Suitable oil to be used in the present invention are polybutene oils and mineral oils such as naphthenic oils and paraffinic oils, triglyceride based oils (such as castor oil), polypropylene and polypropylene glycol oils. It is also possible to use mixtures of the above oils. Preferred oils or oil compositions have a viscosity at 100°C between 2 and 6 cSt.

The composition can also comprise up to 12% by weight of a polyethylene wax. Preferred polyethylene waxes have a melting point comprised between 90 and 120°C.

The composition can also comprise other components, such as antioxidants, dyes, fungus inhibitors.

5

In a preferred embodiment, the composition comprises from 0.05 to 0.4% by weight of an antioxidant.

What follows are some explanatory examples of the composition object the invention, that show the advantage
5 of using radial SEBS as compared to linear SEBS sythetic rubbers. These examples do not imply any limitation of the scope of the invention.

EXAMPLES

10

Synthesis of a radial SEBS

In a 2 liter stainless steel stirred reactor, 1200 ml of cyclohexane, 233 ml of a 18.2% by weight solution of styrene in cyclohexane and 6.4 ml of tetrahydrofurane were
15 introduced in a N₂ atmosphere. They were warmed up to 70°C and 17 ml of a 3% solution of n-butilithium in cyclohexane were added as the polymerization initiator. They were left reacting for 25 minutes to form a polystyryllithium chain, then 128 ml of butadiene were added and they were left
20 reacting for 25 more minutes. At the end of this time 1.5 mmoles of Cl₄Si were added to the reactor and it was left reacting for 5 minutes.

A sample was collected for analysis and what resulted was an SBS polymer with a styrene content of 30%, a vinyl
25 addition in butadiene of 40% and an average molecular weight by number of 75,000. The amount of coupled chains was 92%.

The polymer was subjected to hydrogenation by using Cp₂Ti(4-OMe-Ph)₂, as described in EP 0601953 and EP 0885905.
30 The hydrogenation reaction was carried out in the same vessel where polymerization was performed. The initial temperature for hydrogenation was 90°C, the hydrogen pressure was 10 kg/cm² and the total amount of hydrogenation catalyst used was 0.22 mmol/100g polymer. The
35 hydrogenation proceeded until the hydrogen flow fell down

to zero in 30 minutes, the percentage of hydrogenation was higher than 99% of the olefinic double bounds without any hydrogenation of the styrene units. The resulting hydrogenated SBS, called SEBS, was further isolated from the reaction medium through elimination of the solvent with steam and further drying of the polymer in an oven.

Comparative example 1

A formulation with a basis of mineral oil with linear SEBS synthetic rubber (KG 1652™ by Shell) and polyethylene wax AC-9™ by Allied (group 1, characteristics table 1) in the proportions that are shown in Table 2, shows a Drip Test value FTM-791, % by weight (70°C 24h) = 10.5.

Comparative example 2

A formulation is realized with a basis of mineral oil with linear SEBS synthetic rubber (Calprene-H 6110™ by Repsol Química) and polyethylene wax by Allied AC-9 (group 1) in the proportions of the compositions of Table 2, shows a Drip Test value FTM-791, % by weight (70°C 24h) = 9.8

In examples 1 and 2 it is shown how lower Drip Test values are obtained by using coupled SEBS synthetic rubbers.

Example 1

A formulation is realized with a basis of mineral oil with a coupled SEBS synthetic rubber, Sample A1, in the proportions of the compositions of Table 2 and polyethylene wax by Allied AC-9™ (group 1), has a Drip Test value FTM-791 of 2.4% by weight (70°C 24h).

The characteristics of Sample A1 are: content of styrene 33,0% by weight, coupled with Cl₄Si, approximate molecular weight 80,000 and content of 1,2 polybutadiene before hydrogenating 40% based on the butadiene fraction.

Example 2

A formulation is realized with a basis of mineral oil with a coupled SEBS synthetic rubber, Sample A2, in the proportions of the compositions of Table 2 and polyethylene wax by Allied AC-9™ (group 1), shows a Drip Test value FTM-791 of 3.8% by weight (70°C 24h)

The characteristics of sample 2 are: content in styrene 30.6% by weight, coupled with Cl₄Si, approximate medium molecular weight 83,000 and content in 1,2 polybutadiene before hydrogenating 40.6%.

Example 3

In example 3 it is shown that the final properties of the compositions of the invention do not change with the crystallinity of the waxes used, in contrast with the behavior of compositions based on a conventional linear synthetic rubber.

Compositions are realized in the proportions that are shown in Table 2, wherein while keeping the proportions steady, the polyethylene wax is changed, the main difference being crystallinity. In Table 2 it is shown how the Drip Test values of the composition with linear SEBS worsen (increase) when the polyethylene wax is changed, while the values of the compositions realized with a radial SEBS are essentially the same.

The main characteristics of the polyethylene waxes groups AC-9™ used are shown in Table 1, by measuring the difference in crystallinity both by Diffraction of X Rays (DRX) and by differential Calorimetry (DSC):

30

35

8

Table 1

		Group 1	Group 2
5	Crystallinity DRX (FWHM) %:		
	Peak 110	0.64	0.78
	Peak 200	0.82	0.93
	Molecular w. (GPC) ⁽⁵⁾		
	Mn	3000	2790
10	Mw	7340	6850
	Mz	13000	12700
	Mw/Mn	2.45	2.46
	Chromatography		
	C18-C70%	48.3	61.2
15	>C70%	51.7	38.8
	DSC		
	H1 (J/g)	176	153
	H2 (J/g)	166	151


20 FWDH: Full Width Half Maximum
 GPC: Gel Permeation Chromatography

25

30

Table 2

	Test 1	Test 2	Test 3	Test 4
Composition				
5 Mineral oil	87.3	87.3	87.3	87.3
Linear SEBS Synthetic rubber (Kraton G-1652™)	4.9	4.9	-	-
10 Coupled SEBS Synthetic rubber (sample A1)	-	-	4.9	4.9
Wax AC-9™ (group 1)	5.0	-	5.0	-
Wax AC-9™ (group 2)	-	5.0	-	5.0
Additives rest	2.8	2.8	2.8	2.8
15				
Properties				
Melting point, °C ASTM-D-127	98.4	98.2	98.8	97.6
20 Viscosity at 120°C, cSt ASTM-D-445	27.9	28.6	29.9	30.2
Drip-Test at 70°C/24h FTM-791	7.1	11.9	3.8	3.9
25				
30				

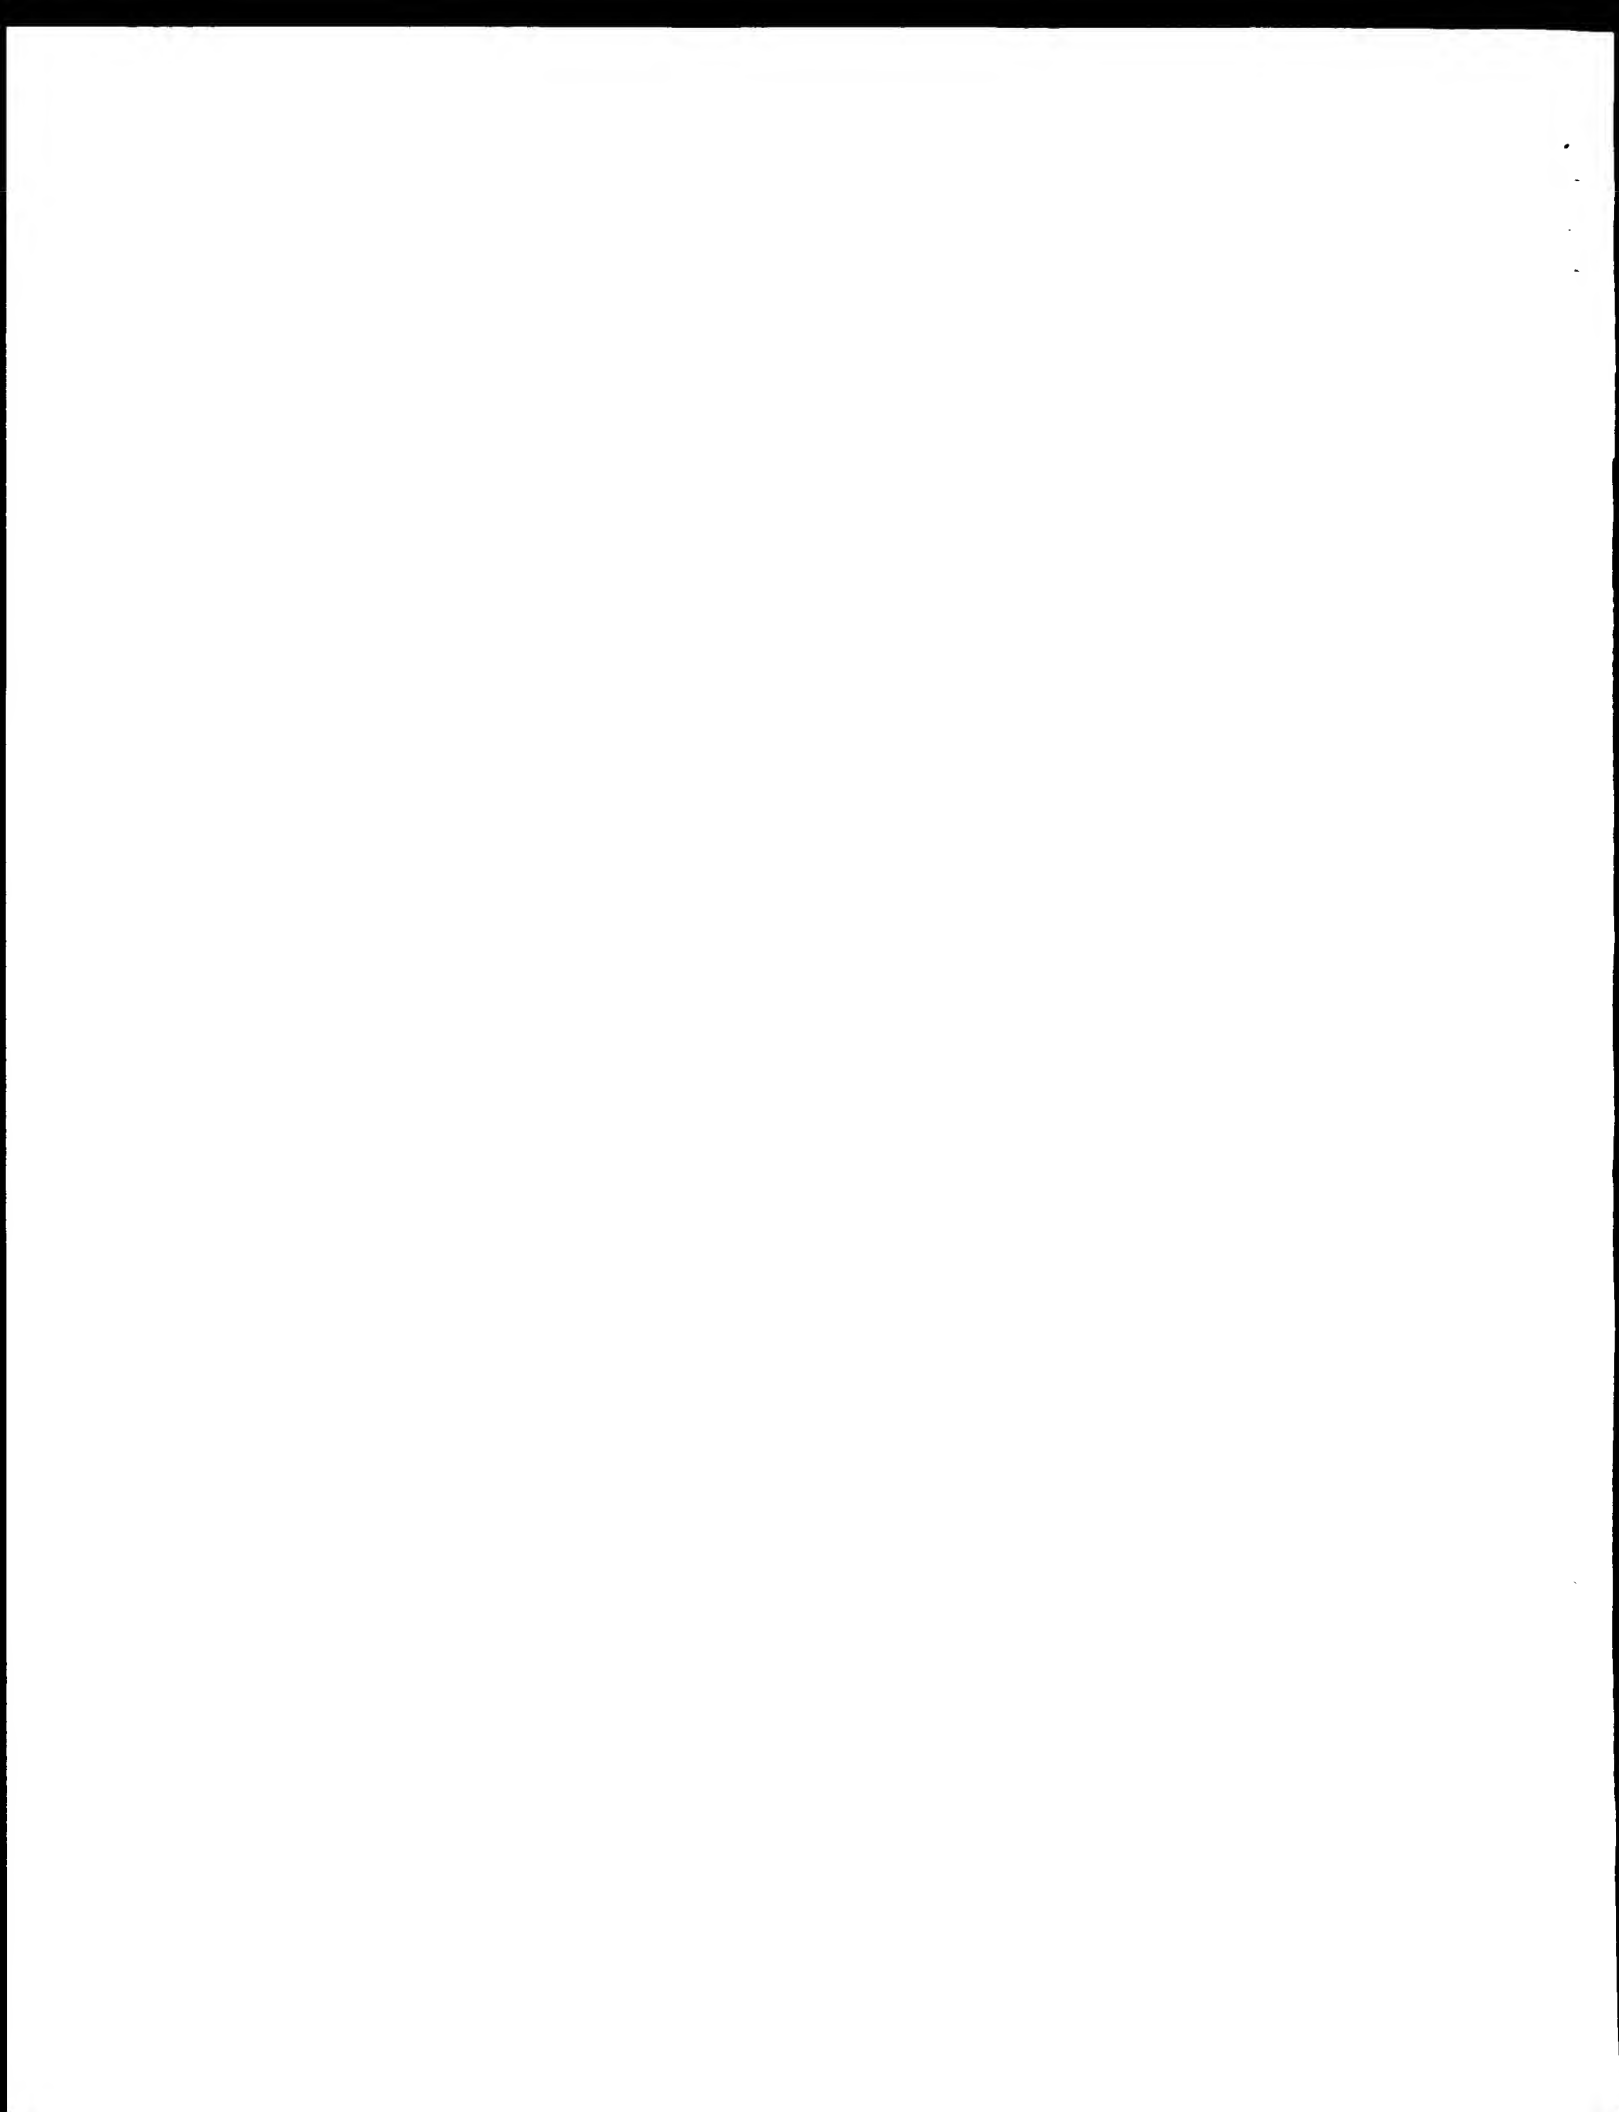

10


C L A I M S

- 1.- Composition for cables filling comprising a mineral or
synthetic oil and a radial hydrogenated SEBS synthetic
5 rubber.
- 2.- A composition according to claim 1 further comprising a
polyethylene wax.
- 3.- The composition of claim 1 or 2 wherein the proportions of
the components are: mineral oil from 70 to 90% and radial
10 hydrogenated SEBS synthetic rubber from 2 to 15% and from
0 to 12% by weight polyethylene wax.
- 4.- The composition of anyone of claims 1 to 6 wherein the
styrene butadiene radial copolymer is synthesized through
coupling with Cl_4Si or Cl_4Sn .
- 15 5.- The composition of anyone of claims 1 to 4 wherein the
copolymer used has a content in styrene comprised between
20 and 40% by weight.
- 6.- The composition of anyone of claims 1 to 5 wherein the
vinyl content in the SEBS rubber used is higher than 25%.
- 20 7.- The composition of anyone of claims 1 to 6 wherein the
polymer molecular weight is comprised between 30,000 and
110,000.
- 8.- Use of a composition according to anyone of claims 1 to 7
as a cable filling material.

25

30

35

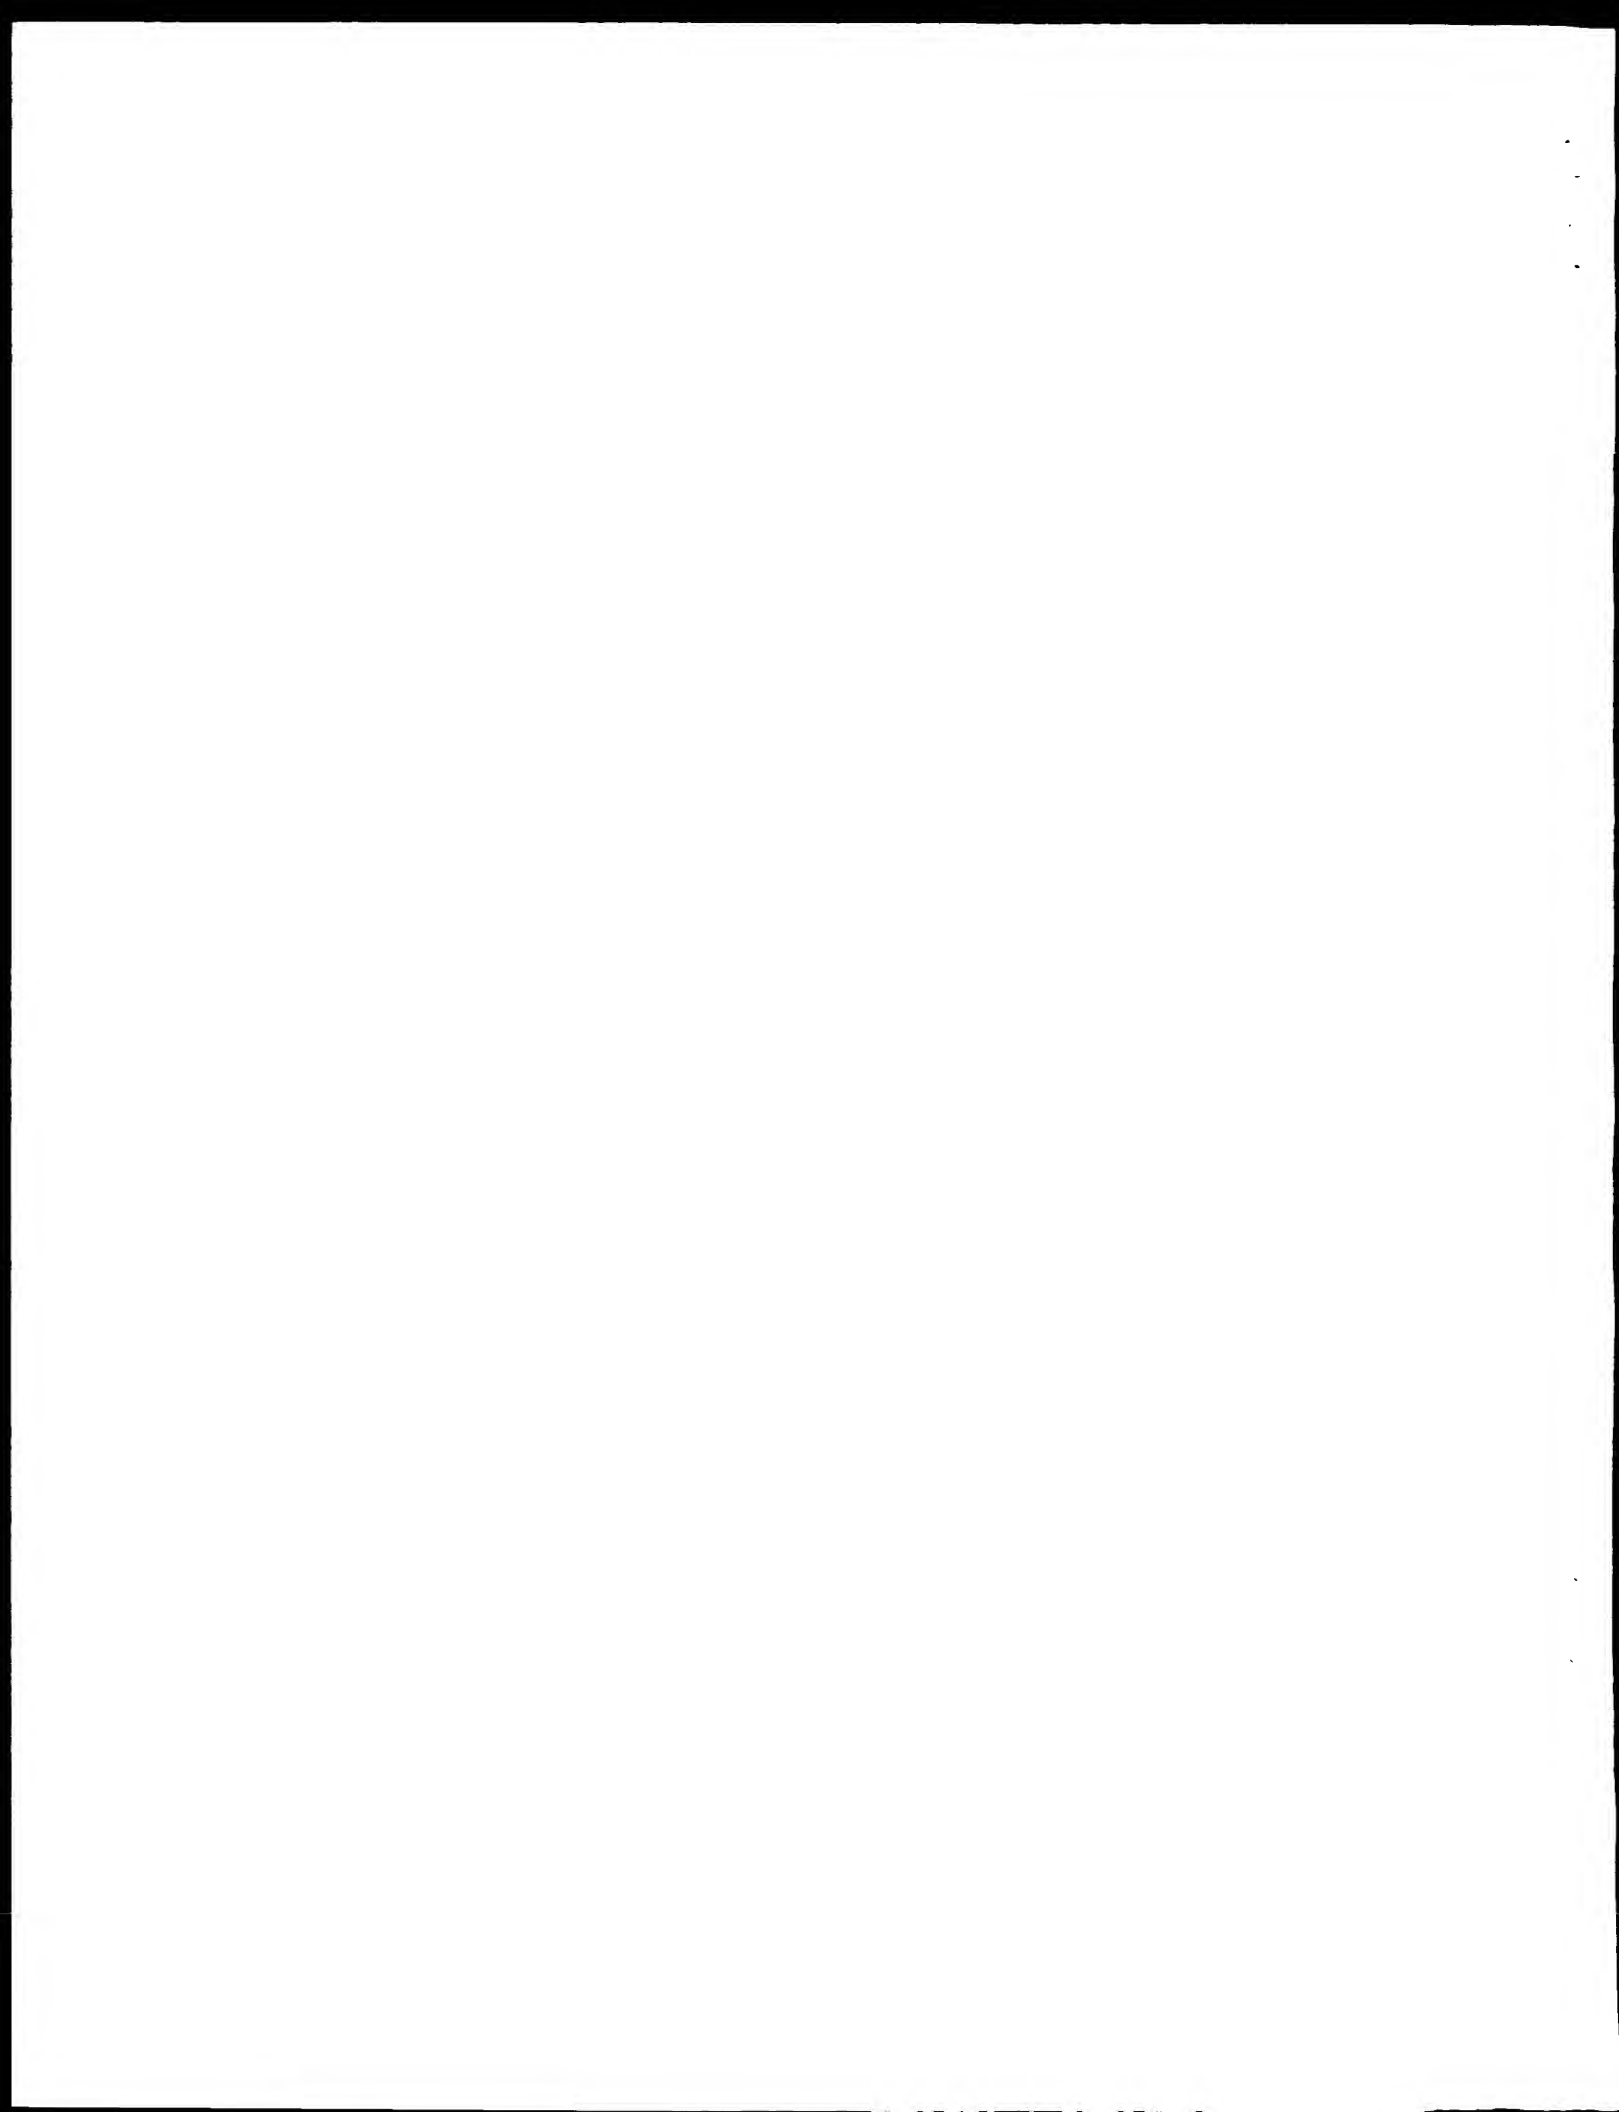

11

A B S T R A C T

The invention relates to compositions for cables filling wherein a styrene-butadiene block copolymer with radial
5 structure is used as a gelling agent. This polymer is obtained through styrene and butadiene sequential polymerization and subsequent reaction with a coupling agent preferably of type $Cl_{4-n}MR_n$, wherein M = Sn or Si, R is an alkyl or aryl group and n is an integer from 0 to 2, and hydrogenation of the resulting
10 polymer. This type of copolymer brings a higher stability to the final properties of the gel as compared with the linear hydrogenated synthetic rubbers usually used in the prior art.

15

20

25

30

35

